




# QSK23-G2

Non-Regulated

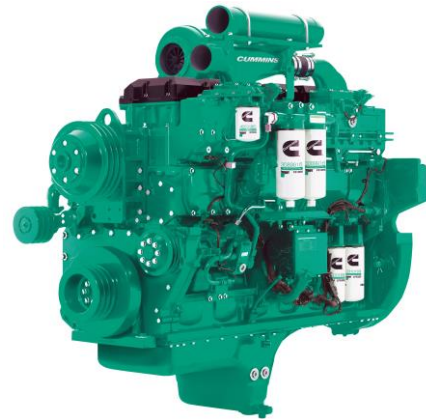

## Description

The QSK23 is an in-line 6 cylinder engine with a 23 litre displacement. This Quantum series utilizes sophisticated electronics and premium engineering to provide outstanding performance levels, reliability and versatility for Standby, Prime and Continuous Power applications.



This equipment has been built to comply with CE certification requirement subject to EU RoHS exclusion per EU 2011/65.



This engine has been designed in facilities certified to ISO9001 and manufactured in facilities certified to ISO9001 or ISO9002.

## Features

**The QSK23 uses the Cummins High Pressure Injection (HPI) PT full authority electronic fuel system.** The HPI PT fuel system is managed by a G-Drive Governor Control System (GCS) controller, which is provided for off-engine mounting in the genset control panel. The Quantum Control has a specific fuel system board to interface with the HPI-PT fuel system and provides an Engine Protection package giving greater customer flexibility and cost effective alternatives in the control design and the benefits of Full Authority electronic control.

**CTT (Cummins Turbo Technologies) HX82 turbo-charging** utilizes exhaust energy with greater efficiency for improved emissions and fuel consumption.

**Charge Air Cooling** - QSK23 engine requires the use of an Air-to-Air heat exchanger or Charge-Air-Cooler (CAC) to reduce intake manifold temperature and to meet the lower emissions requirements

**CoolPac Integrated Design** - Products are supplied complete with cooling package and air cleaner kit for a complete power package. Each component has been specifically developed and rigorously tested for G-Drive products, ensuring high performance, durability and reliability.

**Service and Support** - G-Drive products are backed by an uncompromising level of technical support and after sales service, delivered through a world class service network

## 1500 rpm (50 Hz ratings)

Gross engine output			Net engine output			Typical generator set output					
Standby	Prime	Base	Standby	Prime	Base	Standby (ESP)		Prime (PRP)		Base (COP)	
kWm/BHP			kWm/BHP			kWe	kVA	kWe	kVA	kWe	kVA
724/970	656/880	485/650	694/931	637/854	467/626	650	810	600	750	440	550

## 1800 rpm (60 Hz ratings)

Gross engine output			Net engine output			Typical generator set output					
Standby	Prime	Base	Standby	Prime	Base	Standby (ESP)		Prime (PRP)		Base (COP)	
kWm/BHP			kWm/BHP			kWe	kVA	kWe	kVA	kWe	kVA
847/1135	768/1030	627/840	807/1082	736/987	596/799	760	950	690	865	560	700

## General engine data

Type	4 cycle, turbocharged
Bore mm	170
Stroke mm	170
Displacement litre	23.1
Cylinder block	Cast iron, 6 cylinder
Battery charging alternator	35 amps
Starting voltage	24 volt, negative ground
Fuel system	Cummins direct injection HPI
Fuel filter	Spin-on fuel filters with water separator
Lube oil filter type(s)	Spin-on full flow filter
Lube oil capacity (l)	103
Flywheel dimensions	SAE 0

## Coolpac performance data

Cooling system design	Air-air charge cooled
Coolant ratio	50% ethylene glycol; 50% water
Coolant capacity (l)	110
Limiting ambient temp. ** (°C)	50.9 (50Hz); 55.0 (60Hz)
Fan power (kWm)	14.4 (50Hz); 24.3 (60Hz)
Cooling system air flow (m³/s)**	13.5 (50Hz); 16.6 (60Hz)
Air cleaner type	Dry replaceable element with restriction indicator

\*\* @ 13 mm H<sub>2</sub>O

## Fuel consumption 1500 (50 Hz)

%	kWm	BHP	L/ph	g/kWh
<b>Standby Power</b>				
100	724	970	168	44.3
<b>Prime Power</b>				
100	656	880	151	39.9
75	492	660	117	30.8
50	328	440	79	21.0
25	164	220	44	11.6
<b>Continuous Power</b>				
100	485	650	115	30.3

## Fuel consumption 1800 (60 Hz)

%	kWm	BHP	L/ph	g/kWh
<b>Standby Power</b>				
100	847	1135	194	51.3
<b>Prime Power</b>				
100	768	1030	176	46.4
75	576	773	133	35.1
50	384	515	93	24.5
25	192	258	55	14.5
<b>Continuous Power</b>				
100	627	840	143	37.7

## Weights and dimensions (engine only)

Length mm	Width mm	Height mm	Weight (dry) kg
2976	1656	1964	3245

## Ratings definitions

Emergency Standby Power (ESP):	Limited-Time Running Power (LTP):	Prime Power (PRP):	Base Load (Continuous) Power (COP):
Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. Emergency Standby Power (ESP) is in accordance with ISO 8528. Fuel Stop power in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.	Applicable for supplying power to a constant electrical load for limited hours. Limited-Time Running Power (LTP) is in accordance with ISO 8528.	Applicable for supplying power to varying electrical load for unlimited hours. Prime Power (PRP) is in accordance with ISO 8528. Ten percent overload capability is available in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.	Applicable for supplying power continuously to a constant electrical load for unlimited hours. Continuous Power (COP) in accordance with ISO 8528, ISO 3046, AS 2789, DIN6271 and BS 5514.

For more information contact your local Cummins distributor  
or visit [power.cummins.com](http://power.cummins.com)

**Our energy working for you.™**

